

**SYLTHERM™ XLT****Product Type** Silicone heat transfer fluid**Applications**



- Single-fluid process heating and cooling systems in the pharmaceutical and fine chemical industries.

Recommended Use Temperature Range -100°C (-150°F) to 260°C (500°F)**Description** SYLTHERM™ XLT heat transfer fluid is a specially formulated, high-performance silicone polymer designed for use as a low temperature, liquid-phase heat transfer medium. It offers outstanding low temperature heat transfer and pumpability, plus excellent thermal stability. SYLTHERM XLT fluid has essentially no odor, is low in acute oral toxicity, and is not listed as reportable under SARA Title III, section 313.^{††}^{††}You may need to comply with similar or additional regulations in other countries.**Typical Properties†**

Composition		
Dimethyl Polysiloxane		
Color	Crystal-clear liquid	
Property	SI Units	English Units
Viscosity at 25°C (77°F)	1.4 mPa•s	1.4 cp
Flash Point ² , Closed cup	47°C	116°F
Flash Point ³ , Open cup	54°C	130°F
Autoignition Temp., ASTM D-2155	350°C	662°F
Acid Number, Typical		0.01
Freeze Point	-111°C	-168°F
Density at 25°C (77°F)	852 kg/m ³	7.1 lb./gal.
Specific Gravity at 25°C (77°F)		0.85
Heat of Combustion	32,800 kJ/kg	14,100 Btu/lb.
Average Molecular Weight		317
Estimated Critical Temperature	327°C	620°F
Estimated Critical Pressure	12.16 bar	12 atm
Estimated Critical Volume	3.9 l/kg	0.063 ft. ³ /lb.

[†]Not to be construed as specifications.²ASTM D92³ASTM D93

Thermal Expansion of SYLTHERM XLT Fluid

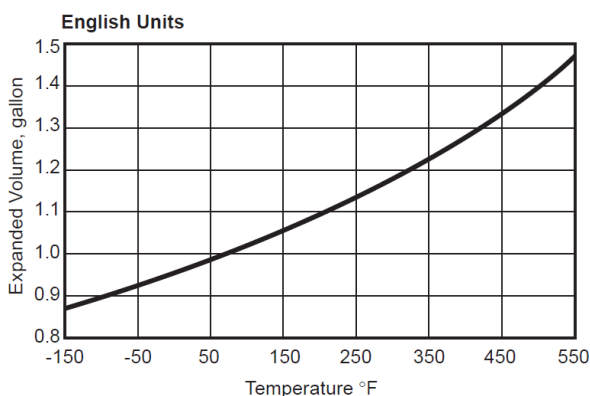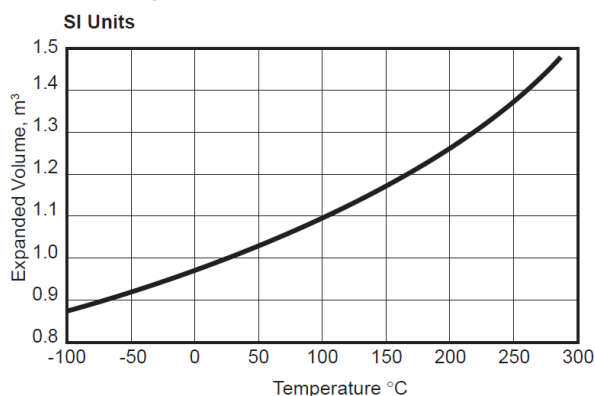

Saturation Liquid Properties of SYLTHERM™ XLT Fluid (English Units)

Temperature °F	Specific Heat Btu/(lb.)(°F)	Density lb./ft. ³	Thermal Conductivity Btu/hr. ft. ² (°F/ft.)	Viscosity (cP)	Vapor Pressure (psia)
-150	0.363	61.23	0.0776	90.2	
0	0.405	55.88	0.0686	2.97	
150	0.446	50.53	0.0581	0.74	0.3
250	0.474	46.96	0.0505	0.42	3.2
350	0.502	43.40	0.0424	0.28	15.2
450	0.530	39.83	0.0339	0.21	47.5
550	0.558	36.26	0.0250	0.16	113.6

Saturation Liquid Properties of SYLTHERM™ XLT Fluid (SI Units)

Temperature °C	Specific Heat kJ/kg K	Density kg/m ³	Thermal Conductivity W/m K	Viscosity mPa·s	Vapor Pressure kPa
-100	1.520	978.5	0.1341	78.6	
-20	1.688	896.4	0.1192	3.1	
60	1.826	814.2	0.1019	0.80	1.8
140	2.024	732.0	0.0827	0.36	40.1
220	2.192	649.8	0.0620	0.22	261.9
280	2.318	588.2	0.0455	0.17	701.8

Product Stewardship

The Dow Chemical Company and its subsidiaries (“Dow”) has a fundamental concern for all who make, distribute, and use its products, and for the environment in which we live. This concern is the basis for our Product Stewardship philosophy by which we assess the safety, health, and environmental information on our products and then take appropriate steps to protect employee and public health and our environment. The success of our Product Stewardship program rests with each and every individual involved with Dow products—from the initial concept and research, to manufacture, use, sale, disposal, and recycle of each product.

Safety Considerations

Material Safety Data (MSD) sheets are available from The Dow Chemical Company. MSD sheets are provided to help customers satisfy their own handling, safety and disposal needs and those that may be required by locally

applicable health and safety regulations. MSD sheets are updated regularly, therefore, please request and review the most current MSD sheet before handling or using any product. These are available from the nearest Dow sales office.

Customer Notice

Dow encourages its customers to review their application of Dow products from the standpoint of human health and environmental quality. To help ensure that Dow products are not used in ways for which they were not intended or tested, Dow personnel will assist customers in dealing with ecological and products safety. Your Dow sales representative can arrange the proper contacts.

Contact information:

For more information about this product please call The Dow Chemical Company.

North America: +1 (800) 447-4369
Latin America: +55 (115) 184-8722
Europe: +3 (111) 567-2626
Asia/Pacific: +6 (037) 965-5392
<http://www.dowtherm.com>

NOTICE: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

